

DESCRIPTION

- Metal construction with a chrome and spot resistant stainless finish
- G1/2 inlet connections
- Includes 600mm long flexible inlet hoses

OPERATION

- Lever style handle
- Pull-on /Push-off
- Temperature controlled through 100 degree arc of handle travel

FI OW

- Flowrate is about 5.39L/min at 0.3Mpa with aerator
- Flowrate is about 3.19L/min at 0.1Mpa with aerator

CARTRIDGE


• MOEN Duralast cartridge

STANDARD

• Designed to meet GB 18145

WARRANTY


• 5years limited warranty against leaks and drips



ORCHID
Single Mount Single-Handle Lavatory Faucet

Models: GN19121/GN19121SRN

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 34mm MIN. TO 38mm MAX.DIA.HOLE

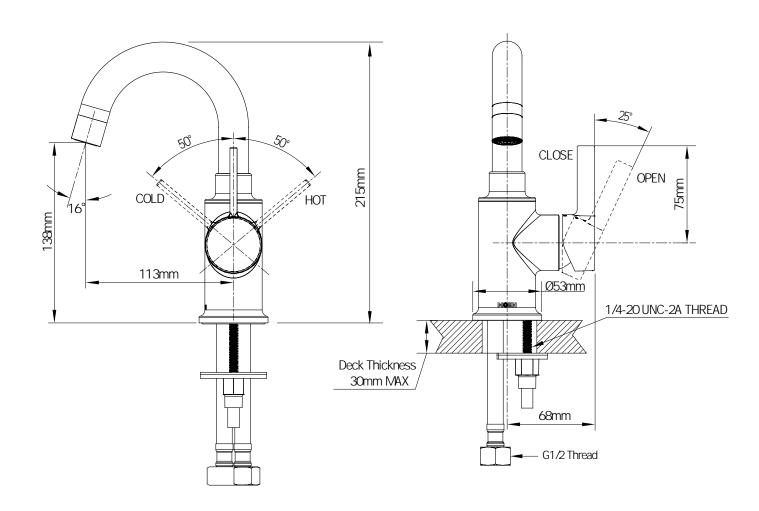

CRITICAL DIMENSION

(DO NOT SCALE)