

MOEN® 摩恩

Specifications

DESCRIPTION

- G1/2 connections
- Thermostatic valve design and with 3F hand shower and 1500mm shower hose

OPERATION

- Knob Style handle
- Temperature handle operates through a 237° arc with maximum cold at full clockwise rotation and maximum hot at full counterclockwise rotation
- Safety stop preset temperature at 38 °C
- Factory established temperature range from 15 °C to 49 °C

FLOW

- Flowrate at 0.1MPa HH shower is about 4.6L/min

CARTRIDGE


- Thermostatic cartridge design with Nonmetallic/no-ferrous material

STANDARDS

- Design to meet Q/MESN 20-2022




WARRANTY

- 5 years limited warranty against leaks and drips

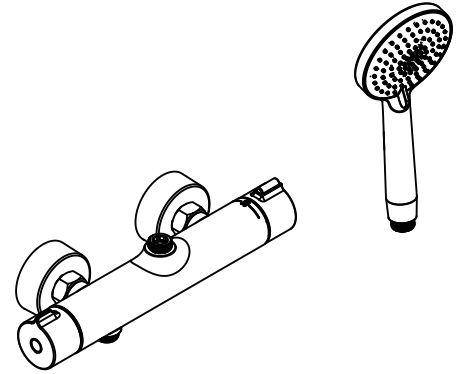

Sterope series Thermostatic Tub Shower Faucet

MODELS : 57401 Series

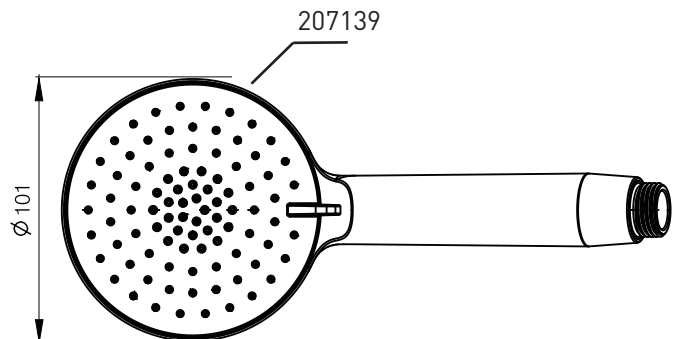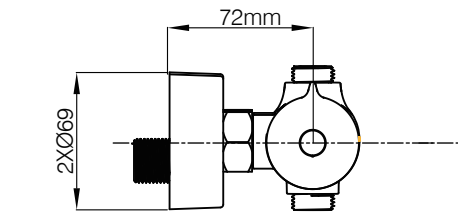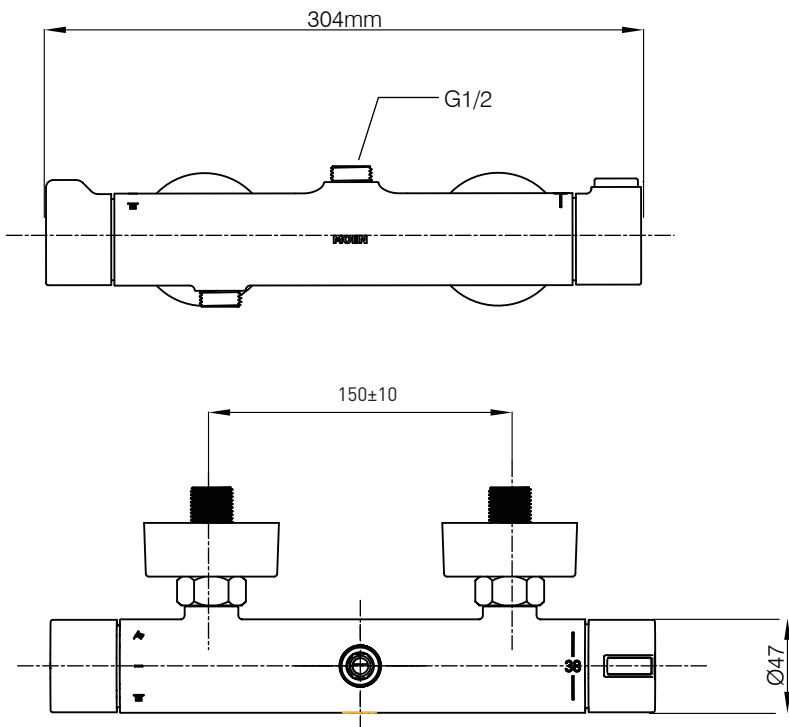

CRITICAL DIMENSIONS DO NOT SCALE