

## DESCRIPTION

- Metal construction with a chrome finish
- 600mm Flexible supplies with G 1/2 inlet connections
- Includes plastic pop-up waste assembly

## OPERATION

- Lever style handle
- Pull-on / Push-off
- Temperature controlled through 100 degree arc of handle travel

## FLOW

- Flowrate is about 6.5 L/min at 0.3Mpa with aerator
- Flowrate is about 4.3 L/min at 0.1Mpa with aerator

## CARTRIDGE


- MOEN Duralast cartridge

## STANDARD

- Designed to meet GB 18145

## WARRANTY


- 5years limited warranty against leaks and drips

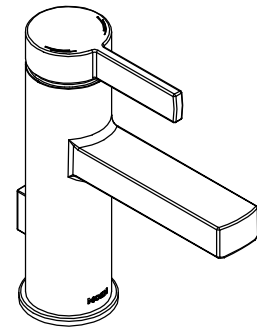

Sterope  
Single Mount One-Handle Lavatory Faucet

Models: GN57121 Series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED  
THRU 34mm MIN. TO 37mm MAX. DIA. HOLE

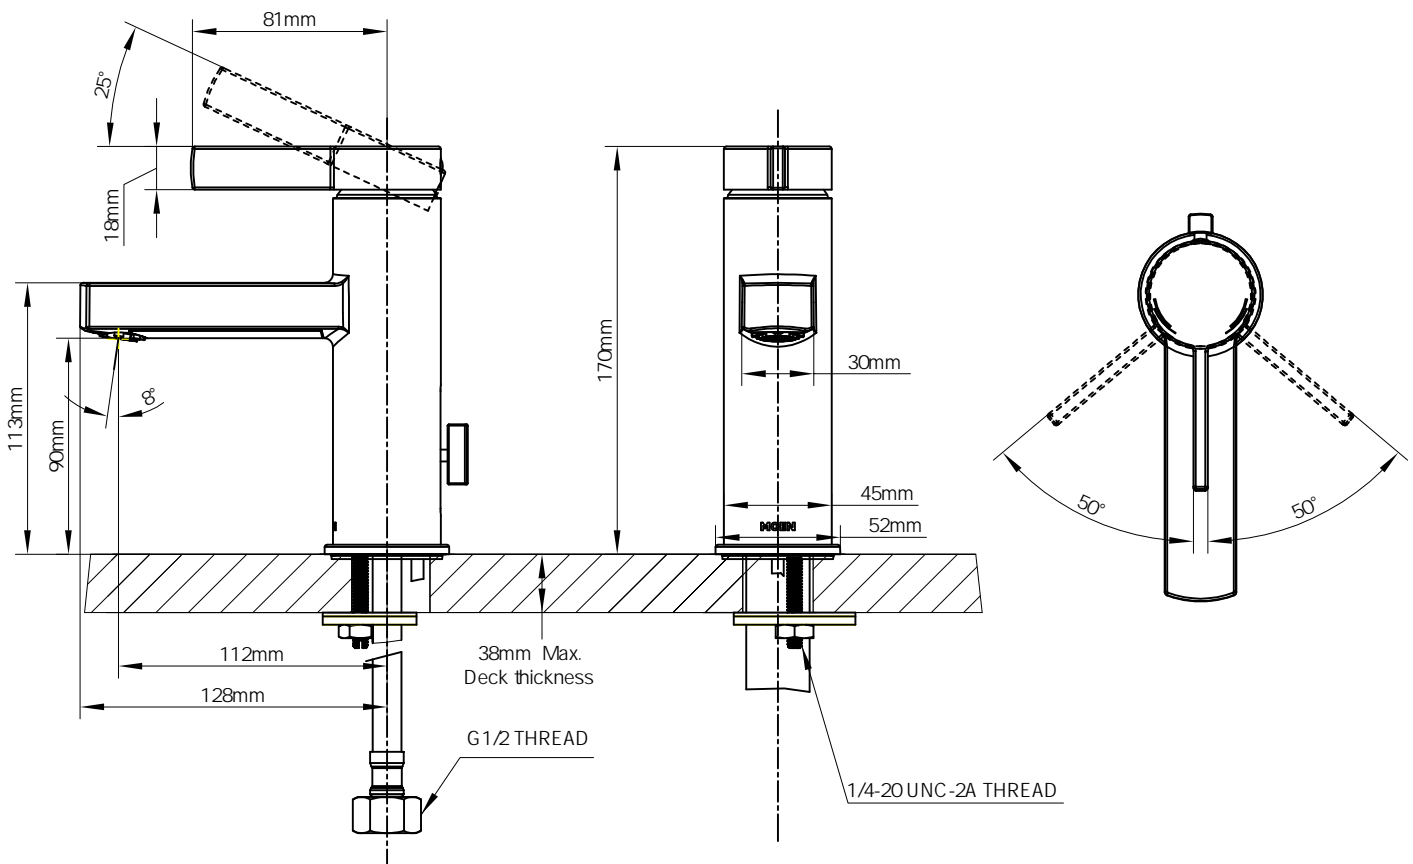

CRITICAL DIMENSION

(DO NOT SCALE)