

MOEN® 摩恩

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- G1/2 connections
- Accessories are various by model.
- Including plastic POP-UP waste.

OPERATION

- Lever Style handle
- Pull-on / Push-off
- Temperature controlled through 90 degree arc of handle travel

FLOW

- Water flowrate is about 3.0L/min to 4.5L/min at 0.1Mpa

CARTRIDGE


- Ceramic 35mm cartridge design
- Ceramic material

STANDARDS

- Desigend to meet GB 18145, GB 25501 (Grade 1)

WARRANTY





- 5 years limited warranty against leaks and drips

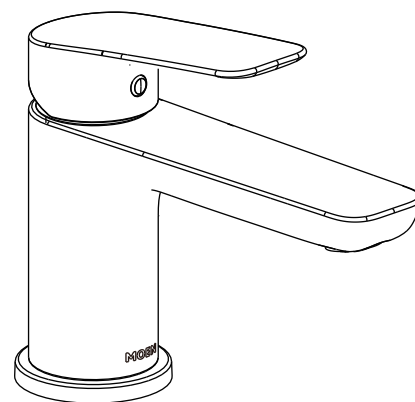

York

Single Mount Single-Handle Lavatory Facuet

MODELS : GN10121
GN10121BP

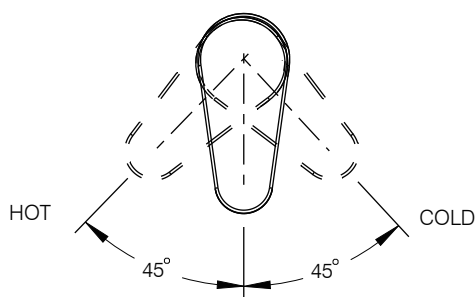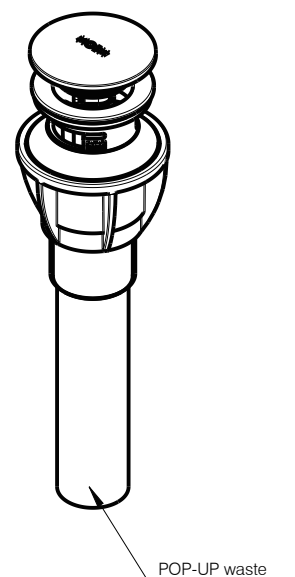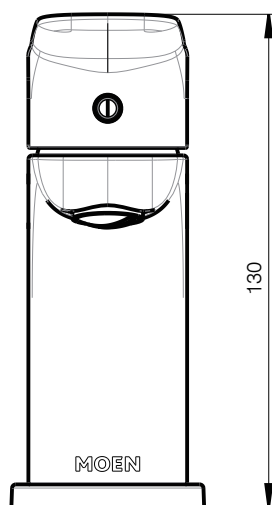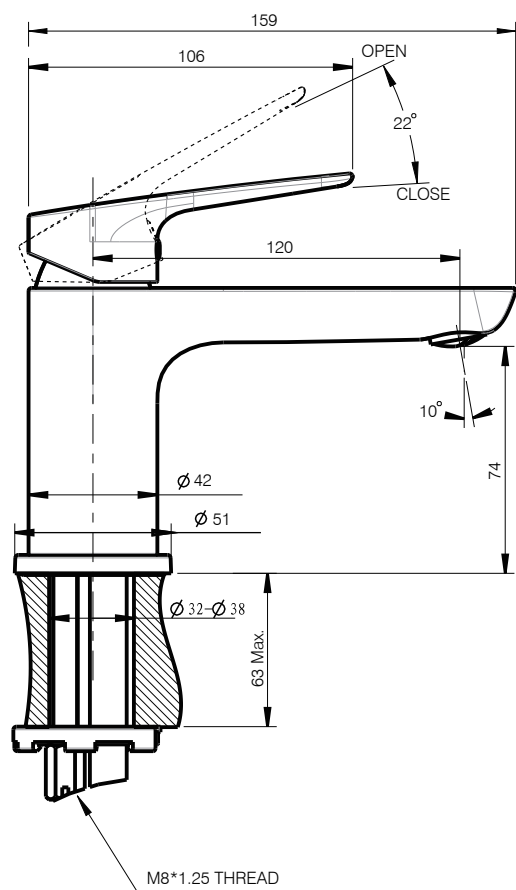

CRITICAL DIMENSIONS DO NOT SCALE

Unite: mm