

DESCRIPTION

- Metal construction with a chrome finish
- G1/2 inlet connections
- Includes 600mm flexible inlet hoses

OPERATION

- Lever style handle
- Pull-on / Push-off
- Temperature controlled through 100 degree arc of handle travel

FLOW

- Flowrate is about 5.5L/min at 0.3Mpa with aerator
 Flowrate is about 3.2L/min at 0.1Mpa with aerator


CARTRIDGE

Moen Duralast cartridge

STANDARD

• Designed to meet GB 18145


• 5 years limited warranty against leaks and drips



FRIEDA Single Handle Single Mount Kitchen Faucet

Models: GN5069 series / GN60111 series / GN60101series

NOTE: SEE REVERSE SIDE FOR **ILLUSTRATED PARTS**

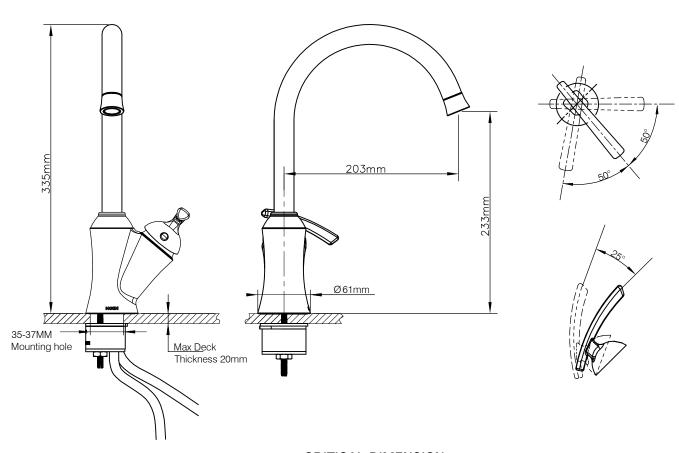

CRITICAL DIMENSION

(DO NOT SCALE)