

# MOEN® 摩恩

# Specifications

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- G1/2 inlet connections
- Includes 600mm long flexible inlet hoses
- Pulldown spray with 1350mm braided hose
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout provides ability to install handle on either side

## OPERATION

- Lever style handle, temperature controlled by 100° arc of handle travel
- Operates in stream or spray mode in the pulldown or retracted position

## FLOW

- Water flowrate is about 3.0 L/min to 4.5 L/min at 0.1 Mpa
- Water flow difference is limited to 3.0 L/min maximum from 0.1 Mpa to 0.3 Mpa

## CARTRIDGE


- MOEN Duralast cartridge

## STANDARDS

- Designed to meet GB 18145; GB 25501

## WARRANTY

- 5 years limited warranty against leaks and drips

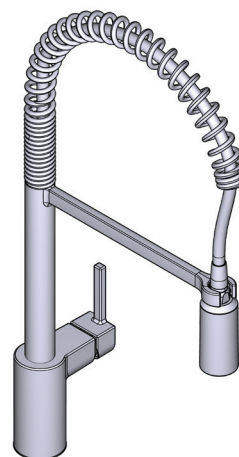


## ALIGN

### SPRING KITCHEN

MODELS: GNMCL5923 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 34mm MIN. TO 38mm MAX. DIA. HOLE

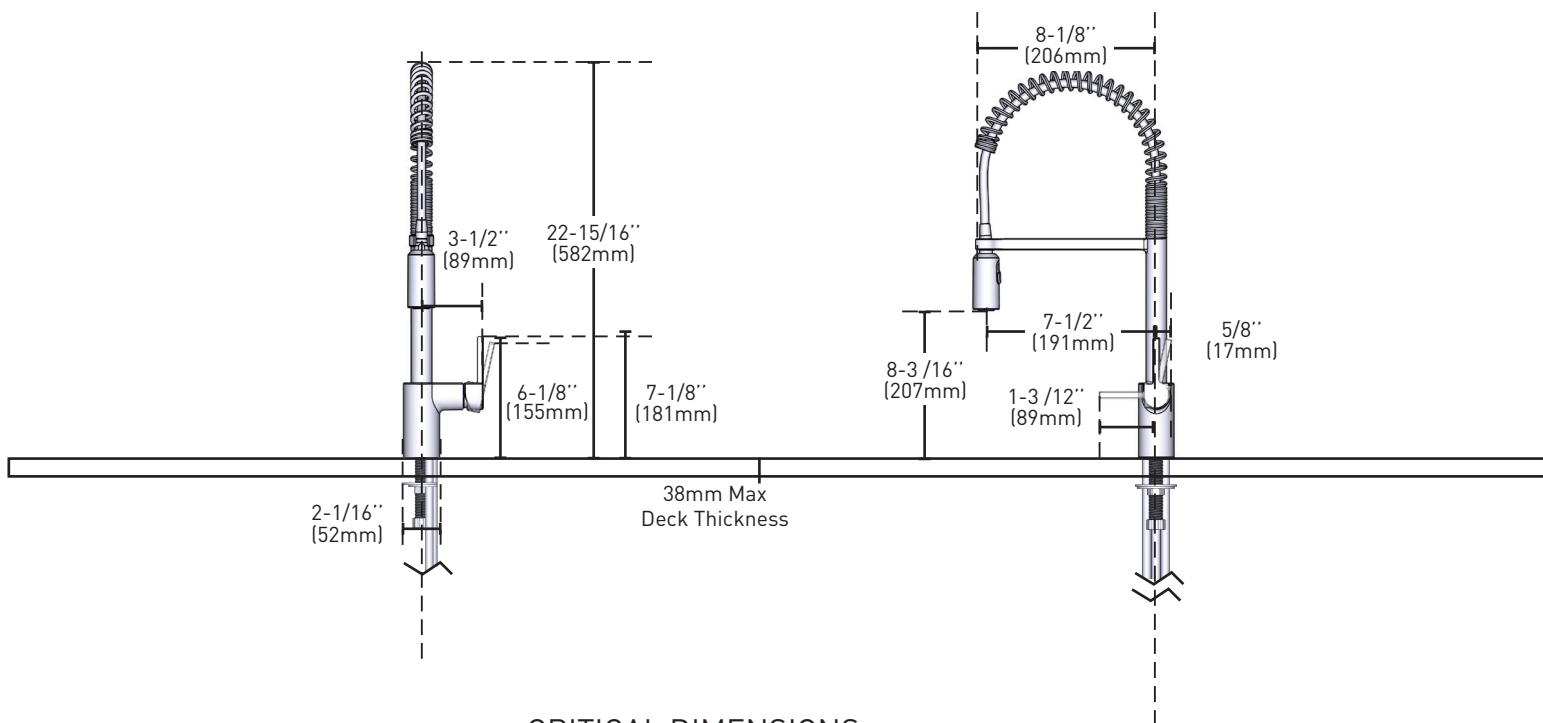

CRITICAL DIMENSIONS DO NOT SCALE