



- Metal construction with a chrome and spot resistant stainless finish
- G 1/2 inlet connections
- Includes Plastic pop-up type waste assembly
- Includes 600mm long flexible inlet hoses



- Lever style handle
- Pull-on /Push-off
- Temperature controlled through 100 degree arc of handle travel

- Flowrate is about 6.0L/min under 0.3Mpa with restrictor and aerator
- Flowrate is about 4.2L/min under 0.1Mpa with restrictor and aerator

- MOEN Duralast 146565 cartridge design
- Nonmetallic / nonferrous and ceramic material

- Designed to meet GB18145

- 5 years limited warranty against leaks and drips

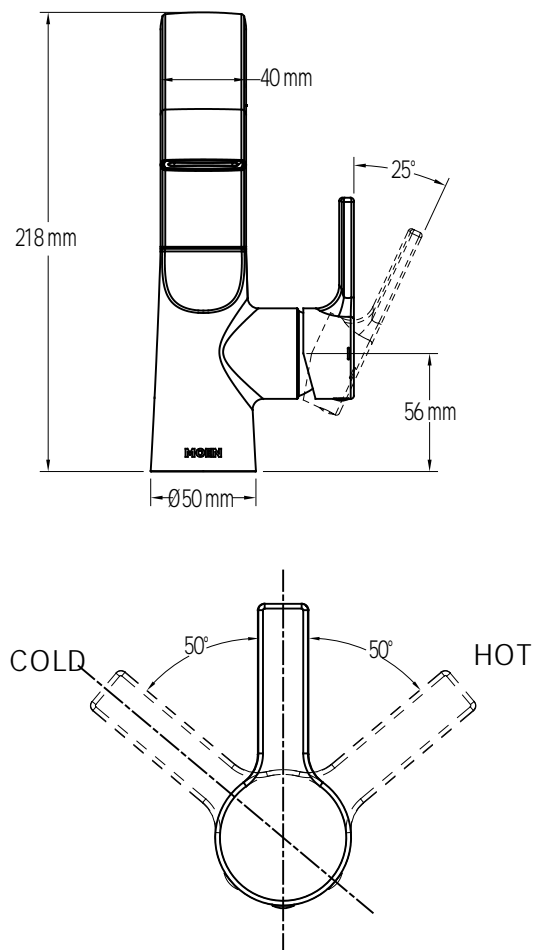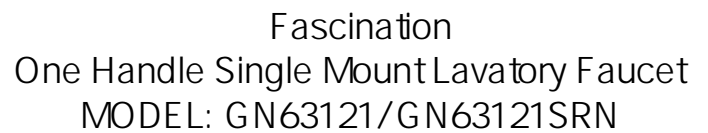

Rev 09/2018