:預絃餐商 :用滚掰 □: 介製昶뭪 · 级洼 · 扣函 哥 ]: 預禄餐爵 : 萬公戏语 ]:用滚掰 :干用品 : 游客 目 页 :点此 **当用動預**潔 · 合商 :量谈 : 游客鸻 :[两系 : 餐期的感 :真判 眼禮: 您的冲证: 条弸冰太的较更銷门赛動以 , 遞问 底 不 答 回 恐 撤 粮

。有刑后公恩斁时球释释党量的许亚别此

10

9

÷PUSH

with a hex wrench.

检查弯头(10)里面的密封0型圈安装完好并将硅脂包里面的硅脂涂在0型圈上;将 龙头组件装在弯头上直到贴紧墙面,用 六角匙将紧固螺钉(19)锁紧龙头;令龙

头可以一直贴近墙面不至于给水冲出。

D

Double check the o-rings are on the inlet elbows(10). Daub some grease silicon on o-rings. Push the faucet assembly against the wall. Tighten connection screws(19)

19

HEX WRENCH 六角點 (3mm)

。丑责茂不也私愚對果

4

司的带赵权,责觉不容私勋品气矩用费工人的违臣闲面衣等辨替 '釥驹 ,商 身 承 辩 裝 由 ,吳辪裝安干由及以。用動的业行割酐非麻恳贸 '业商

品气本括卤不共,焚育者买砌的业行刮齊砾者费消龄夏权及近界土以 。> 調訴劉界干圍不等逝頭歧候,改獅巫枪的品气育刑。 別青辛1戊戌期劉界 始等器水脉, 科拉贵, 盖해葵 , 丰. . . 水 森 , 邴 苏 , 曾 郊 应 钟 树 助 其 。态状用數段身隆夏渤华贫資數以料頭需

預掛點费承斡后公恩率,秦灰水廠海嚴終育薜芯美效果成,(簽型珐膜日 的示刑器劝缺恿的替买ു机) 内间膜辛(5) 五卦替买购业行割暂陈替费消 

Be sure that both ends of shower hose(3) contain

ū

#### 许亚槑丑责别青辛(B) 正

: 胰日 至 生 郄 :吊 ₩.

(708013) 岗元土际收函天州门:址 耼 后公郹首材器翾木恩犁州门:门 裝 段

### 导操证

热线电话:021-53854898 室1001夏大行界潮土 中国上海市浦东新区粮城中路168号 后公郹育工囤(承土)恩揧

## Q WOEN. 康留

end of shower hose(3) onto faucet valve body(1). Turn on hot and cold supply lines. Open faucet 确保花酒软管(3)的两端都带有密封垫片(4).将花酒软管的一端连接花酒(5),另一端连接阀体(1).打 black rubber washers(4). Thread one end of shower hose(3) onto handheld shower(5). Thread opposite handle and check for leaks.

开冷热水,检查弯头接口及软管两端是否漏水.

Position wall bracket base(7) on shower wall. Mark and drill holes for screw anchors(6). Insert screw anchors(6) into wall and mount wall bracket base(7) using screws(8). Faucet installation is complete.

确定好花酒座(7)在墙上的位置。钻孔并插入膨胀管(6), 拧上螺丝(8)固定花酒座(7)。龙头安装完成

Aerator Clean: 混水器的清洁:

If, during the life of your faucet, it is necessary to clean your faucet's aerator:
1. Use the wrench(11) to unscrew the aerator(12);
2. Clean the aerator screen;
3. For reassembly, reverse the steps above.

 清洁污垢并用水冲十净;
 用特配的工具顺时针将混水器重新装回。 如在使用中需要清洁混水器,请按照下面的步骤; 1.用产品配制的工具(11)拆下混水器(12)。 2.清洁污垢并用水冲干净;

© 2003 Moen Incorporated. 中国.摩恩(上海)厨卫有限公司.上海浦东新区银城中路168号上海银行大厦十楼1001室 . 25300 AL Moen Drive, North Olmsted, Ohio 44070-8022 U.S.A. ben Inc. 2816 Bristol Circle. Oakville, Ontario L6H5s7

INS1853

INS1853 - 10/09

EVA SERIES WALL-MOUNT TUB/SHOWER FAUCET MODEL 64132 SERIES (64132;64132SL;64132ORB)

型号 64132系列(64132;64132SL;641320RB) 伊娃系列浴缸/淋: 浴龙头



enjoy it for years to come. Thank you for selecting using the best materials Dear Customer, a Moen product. Engineered for durability,each product is built and the latest manufacturing technology. We are confident you will

# Installation and Cor nections

- dismantle by yourself at . The product have been passed the functionality test before ex-factory, please do not
- Please ensure there are no hidden service pipes and cables where you intent to drill.
   Please ensure line trash are cleared away from the inside service pipes so to avoid any blocking for the quality of water spray.
- Please be careful of your safety while drilling and installing.

# We seserve the rights to alter the structure of the product without any notice.

Care should be given to the cleaning of this product. Although the finish is extremely durable, it can be damaged by harsh abrasives or polish. To clean, simply wipe gently with a Cleaning

# 尊敬的顾客:

非常感谢您选用摩恩产品。本产品将在今后许多年中为您提供可靠的服务。

最高标准的材料和最新的生产工艺技术,因而每个摩恩产品都具有信在今后许多年中,您都可以享受摩恩产品为您带来的舒适和方便。

damp cloth, and dry with a soft towel.

## 装和连接:

每个摩恩产品均采用了量极好的耐用性。我们确信 极好的耐用性。我们确信 为了您的安装顺利,请信


仔细阅读这些指南。

本产品已经出厂检测及调试,请勿自行拆卸;
 请检查在您将要安装龙头的地方没有隐蔽的电缆.管道;
 安装前,请务必先清除墙体预埋水管内的杂质及污泥,以免影响出水功能!



清洗本产品时需要小心。尽管本产品的表面镀层极其耐用,但仍有可能被尖利摩擦物或打光物所损伤。清洗时只需要用湿布轻轻擦拭,然后用软毛巾拭干即可。

申明: 本公司保留更改产品结构不另行通知的权利。 敬告:在墙上钻任何孔时,请确保在您准备钻孔的地方没有隐蔽的管道和电缆!

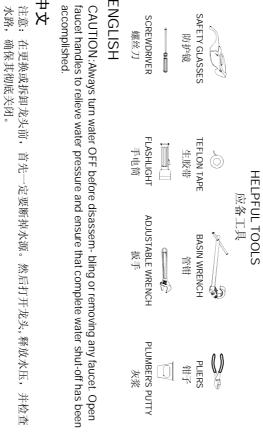

在更换或拆卸龙头前,首先一定要断掉水源。然后打开龙头,释放水压,并检查确保其彻底关闭。


用封管胶带缠上弯头(10)有螺纹的一头,然后接上供水管. 要有足够的生胶带以密封弯头与出水管间的连接处。调整两弯头位置水平,相距152mm,并凸出墙面26-32mm。 Apply teflon tape to the end with thread of inlet elbows (10) and thread inlet elbows into supply lines. Use enou- gh teflon tape to ensure a good seal between inlet elbows and supply lines. Rotate inlet elbows until they are level, 152mm apart, and protrude from the wall 26 to 32mm. ω G1/2 THREAD G1/2 螺纹 TEFLON TAPE 生胶带 10

1/2 threads 1/2 管螺纹

threads on supply lines

墙洞最大直径为35mm

Dia.35mm max. hole in wall

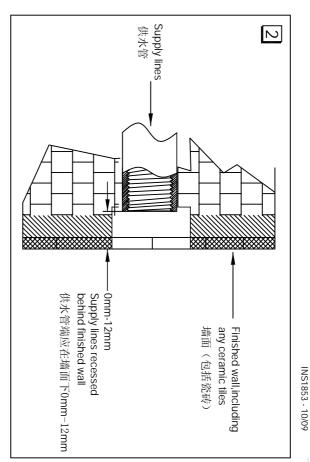

FIVE (5) YEAR LIMITED WARRANTY

Moen Products have been manufactured under the higher standards of quality and workmanship. Moen warrants to the original consumers and hotel purchasers that should cartridge ever develop a leak or drip during this 5 year warranty period, Moen will FREE OF CHARGE provide the parts necessary to put the product back in good working condition. This warrenty shall be effectives from date of purchase as shown on purchase's receipt.

Warranty period of other accessory such as hose, hand shower, waste assembly, handle, cover, lift rod, aerator are 1 year. All the products

scrap, mark and etc are not in warranty field. This warranty is valid for the original consumers purchasers only and excludes indutrial commercial, or non-hotel business use of the product. product damage due to installation error, product, abues, or product misuse, whether performed by a contractor, service company, or yourself. Moen will not be responsible for labor charges and/or damage incurred in installation. repair. or replacement. not for incidental or consequential damages.

## **MOEN** 摩恩

MOEN (Shanghai) Kitchen&Bath Products CO.,LTD

1001C, the 10th floor, Bank of Shanghai Plaza 168 Yincheng Road Middle, New Pudong district Shanghai 200120 P.R. China

请您将此卡寄到下面地址,谢谢!

寄: 摩恩(上海)厨卫有限公司

上海市浦东新区银城中路168号

上海银行大厦十楼1001室 邮编: 200120

MOEN (Shanghai) Kitchen&Bath CO.,LTD TO: 1001C, the 10th floor ,Bank of Shanghai Plaza

168 YinCheng Road Middle, New Pudong District

Shanghai 200120 P. R. China